

6.5" Two-Way Dual Voice Coil In-Ceiling Speaker




OVERVIEW

The SP-DV6 is perfect for locations that cannot support two separate speakers. It provides both stereo channels from one location. With our revolutionary clamping system and easy wire connectivity, the SP-DV6 is a true tool-less architectural speaker. Simply connect the speaker wire to the removable terminals, install the speaker into the cut-out and then push down the levers to engage the clamps to the drywall. The unique clamping system locks the speaker in place. That's it!

A speaker install that takes seconds. No more balancing act on top of a ladder with a screw gun in one hand and the speaker in the other.

HIGHLIGHTS

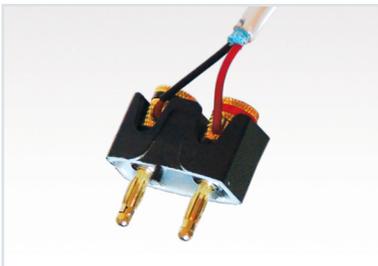

Removable speaker wire terminal.



Unique, patented clamp system allows for easy installation and removal.

SPECIFICATIONS

Speaker Type: In-ceiling, two-way round speaker

Woofers: 6.5" polypropylene woofer

Tweeter: Dual 3/4" silk dome swivel tweeters

Power Handling: 5-100 watts

Nominal Impedance: 8 ohms

Frequency Response: 50-20 kHz

Sensitivity: 91 dB

EQ Adjustments: -3 dB, 0 dB, +3 dB (tweeter and woofer)

Grill: Frameless magnetic micromesh steel grill

DETAILS

SKU: SP-DV6, UPC 656787-600010

Cutout Dimensions: 8.15" (207mm)

Ceiling Thickness: 0.5" min - 1.0" max

Finished Dimensions: 9.45" Diameter (240mm), 3.98" Depth (101mm)

Warranty: Please visit www.urc-automation.com/warranty-statement/