



Installation Manual

MFSPOE-8

Network Switch



MFSPOE-8 Installation Manual ©2010-2014 Universal Remote Control, Inc.

The information in this owner's manual is copyright protected. No part of this manual may be copied or reproduced in any form without prior written consent from Universal Remote Control, Inc.

UNIVERSAL REMOTE CONTROL, INC. SHALL NOT BE LIABLE FOR OPERATIONAL, TECHNICAL OR EDITORIAL ERRORS/OMISSIONS MADE IN THIS MANUAL.

The information in this owner's manual may be subject to change without prior notice.

URC - Control the Experience is a registered trademark of Universal Remote Control, Inc.

Total Control is a registered trademark of Universal Remote Control, Inc.

All other brand or product names are trademarks or registered trademarks of their respective companies or organizations.



500 Mamaroneck Avenue, Harrison, NY 10528
Phone: (914) 835-4484 Fax: (914) 835-4532
www.universalremote.com

TABLE OF CONTENTS

Introduction	1
Features	2
Parts Guide	2
Front Panel Description	3
Rear Panel Description	4
MFSPOE-8 Installation Considerations	5
Installation	6
MFSPOE-8 Installed in a Small System	6
MFSPOE-8 Installation Optimized for Max Number of PoE Ports	7
MFSPOE-8 Installed in the area with the Network Distribution	8
Frequently Asked Questions	9
Specifications	10
Limited Warranty Statement	11
End User Agreement	13
Federal Communication Commission Interference Statement	14
Regulatory Information to the user	15
Declaration of Conformity	16

Introduction

The MFSPOE-8 Network switch is the ideal “Plug-n-Play” solution to supply power to Total Control Keypads and IP Cameras, while protecting network WAP’s (*Wireless Access Points*) from multicast audio streams.

Total Control products, like the DMS-1200 (*Multi-zone Amplifier*), DMS-100 (*Single-Zone Amplifier*) and the SNP-1 (*Streaming Network Player*), all multicast audio streams onto the LAN. The nature of a “multicast” will shut down all wireless access to the network. The MFSPOE-8 was specifically designed for use with Total Control Systems and incorporates **pre-configured MAC filtering**. MAC Filtering completely solves the issue by confining multicast streams to the switch itself, never allowing streams to affect network traffic in the rest of the house. Pre-configuration means you don’t have to be a Network Engineer to configure this switch, simply plug your Total Control products into any port and you’re ready to go. “Plug-n-Play” integration produces reliable, predictable network performance.

Warning: NEVER plug a WAP (*Wireless Access Point*) into the MFSPOE-8, since URC multicast audio streams will shut down any brand or model of WAP.

There’s no need to worry about accidentally damaging any Non-PoE gear with the MFSPOE-8, it will never happen. Eight “Smart” 10/100 PoE (*Power over Ethernet*) auto-sensing ports determine if connected devices are PoE compliant or just standard network devices, and then apply the correct voltages. This greatly simplifies every installation by eliminating the need to run more wires, add separate power supplies (PoE Injectors) and additional AC power strips.


Features

- ◆ MAC filtering prevents multicast audio streams from consuming network bandwidth.
- ◆ Smart PoE ports support keypads, IP cameras, etc.; also compatible with non-PoE devices.
- ◆ Eight (8) 10/100 Smart PoE (*Power-Over-Ethernet*) ports plus one LAN port.
- ◆ Activity and Status LEDs, plus Connectivity indicator
- ◆ Includes 48 volt power supply

Parts Guide

- 1 – MFSPOE-8 MAC Filtering Switch with PoE
- 1 – 1.5M CAT5 Ethernet Cable
- 1 – 48V AC Power Adapter
- 1 – Power Cord for AC Power Adapter
- 1 – Wall Mount Plate and Four Mounting Screws
- 1 – Quick Install Guide

Front Panel Description

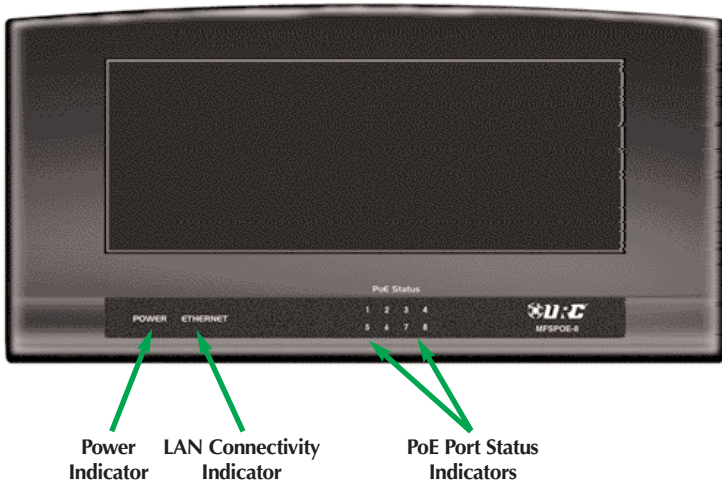


Power Indicator: Illuminates when the MFSPOE-8 Power Supply is connected to AC outlet.

Ethernet Network Connectivity Indicator: Illuminates when the MFSPOE-8 is connected to a LAN and has received an IP Address.

PoE Port Status Indicators: Illuminate when a PoE compliant device is connected to a port.

Rear Panel Description

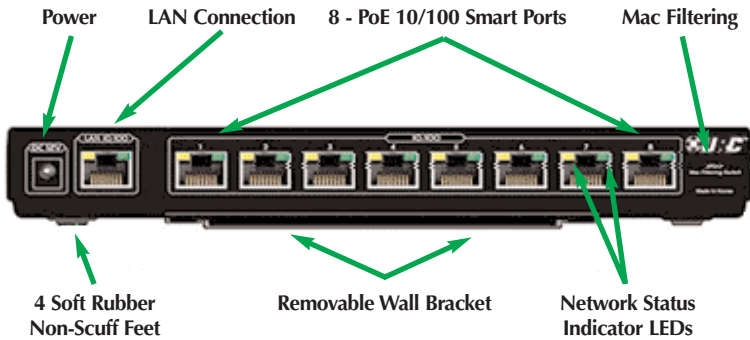

Power: Provides connection to Included 48V Power Supply.

LAN Connection: Provides connection to the LAN (*Local Area Network*).

PoE 10/100 Smart Ports: 8 - PoE 10/100 Smart Ports automatically provide power and connection to compliant PoE devices like Keypads and IP Cameras, while simultaneously providing a safe, non-powered connection to standard Ethernet devices.

MAC Filtering: MAC Filtering prevents multicast audio streams from consuming network bandwidth. Streams are confined to the switch, optimizing local area network performance.


Network Connectivity and Activity Status Indicators (*port specific*): Status indicator LEDs display network connectivity and network traffic feedback, for easy troubleshooting.

Wall Mount Bracket: Convenient removable wall bracket allows the MFSPOE-8 to be mounted to the back of a cabinet or rack. Remove the wall bracket when placing the MFSPOE-8 on a shelf or stand.

MFSPOE-8 Installation Considerations


Only **one** MAC Filtering switch should be used in a typical Total Control system. All streaming products like the DMS-1200, DMS-100 and SNP-1 **must** be connected to the switch. Other Total Control devices that don't stream (like the MRX-10 or the MRX-1) don't have to be connected to the MFSPOE-8.

You **cannot daisy-chain** MFSPOE-8 MAC Filtering switches; communication between switches will be blocked. If you have more than eight of the above streaming components, simply connect a standard network switch to any port on the MFSPOE-8 and then connect the additional components to the standard switch. This allows the additional components to benefit from the MFSPOE-8's MAC Filtering, without affecting communication between devices. If you need more PoE ports, you can plug any standard PoE network switch into any of the available ports, to expand the network.

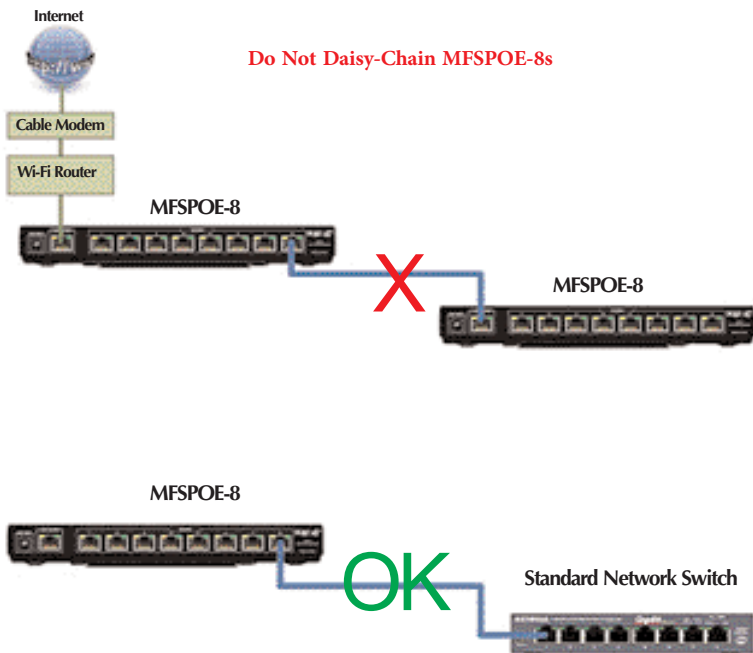

Installation

1. On the back of the MFSPOE-8, connect one end of a CAT5 cable to the port labeled **LAN 10/100**.
2. Connect the other end of the CAT5 cable to the **LAN** (*Local Area Network*).
3. Connect Total Control and standard network devices to any of the eight **PoE 10/100 Smart Ports**.
4. Connect the supplied 48V Power Supply to the MFSPOE-8 and then plug it into an **unswitched** AC outlet.
5. Once powered up, the unit begins working in approximately 30 seconds.

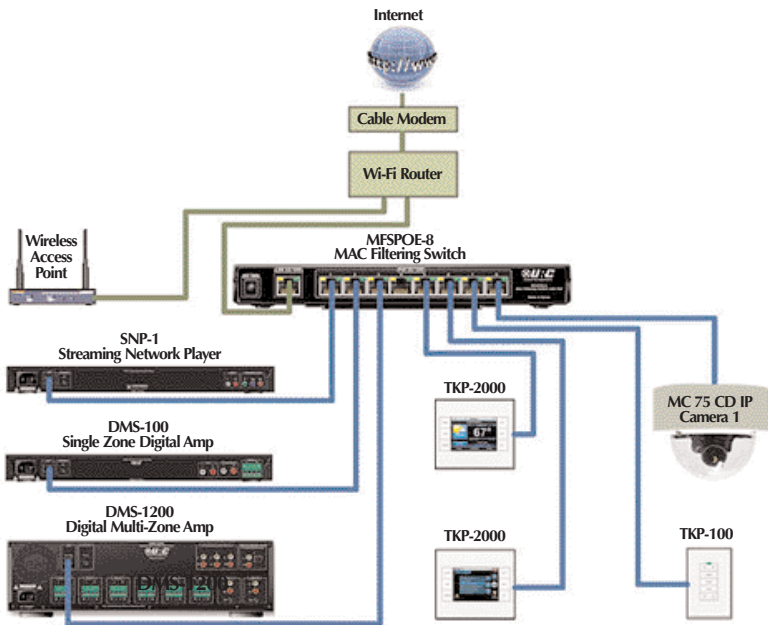


MFSPOE-8 Installed in a Small System

Notes:

- The Wireless Access Point *CANNOT* be connected to the MFSPOE-8; it must be connected to the Router in the LAN.

MFSPOE-8 Installation Optimized for Max Number of PoE Ports

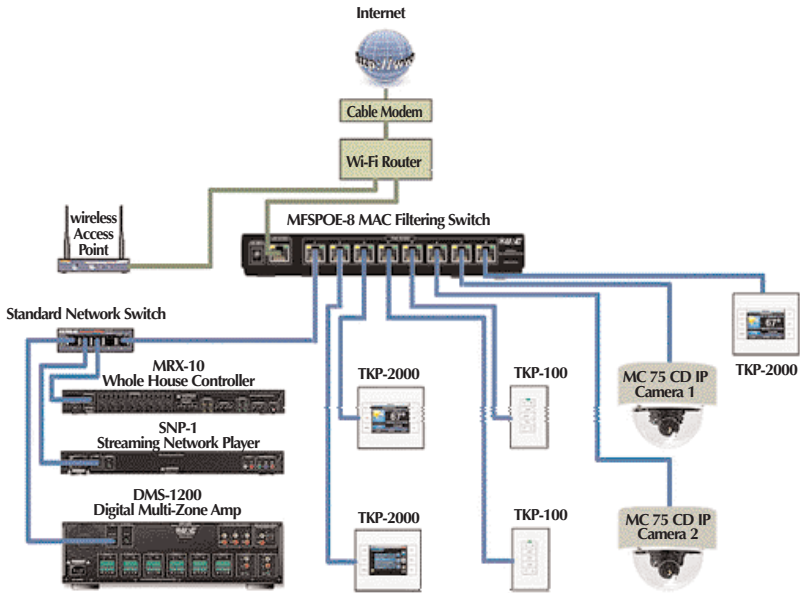


Notes:

- The Wireless Access Point *CANNOT* be connected to the MFSPOE-8; it must be connected to the Router in the LAN.
- A standard network switch is used to connect the DMS-1200 and SNP-1 to the MFSPOE-8. This configuration provides MAC Filtering to the Total Control streaming components, while freeing up additional ports on the MFSPOE-8 to connect PoE devices like Keypads and IP Cameras.
- An MRX-10 doesn't have to be connected to the MFSPOE-8, but can be connected to a standard network switch when convenient to do so.

MFSPOE-8 Installed in the area with the Network Distribution

Occasionally you get a retrofit installation where only one CAT5 wire has been run to a room, and there's no way to run another one. In this case, locate the MFSPOE-8 in the Utility Room, Garage, or wherever the central distribution point for the Network is located and install standard network switches in rooms where you plan to locate a DMS-1200, DMS-100 or SNP-1.

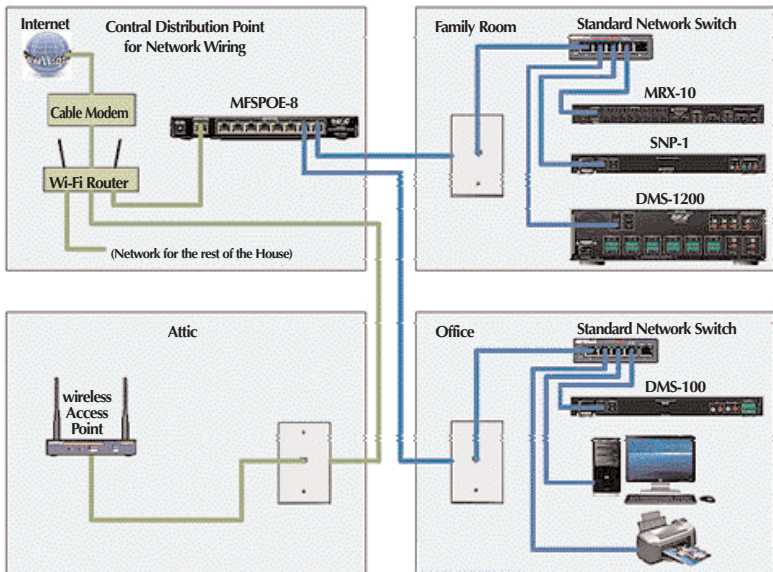

Notes:

- The Wireless Access Point *CANNOT* be connected to the MFSPOE-8; it must be connected to the Router in the LAN.
- Standard network switches are used to connect the DMS-1200, DMS-100 and SNP-1 to the MFSPOE-8. This configuration provides MAC Filtering to the Total Control streaming components, while freeing up additional ports on the MFSPOE-8 to connect PoE devices like Keypads and IP Cameras.
- An MRX-10 doesn't have to be connected to the MFSPOE-8, but can be connected to a standard network switch when convenient to do so.

Frequently Asked Questions

Do I need to use a MFSPOE-8 in a Total Control system?

If you are only controlling a **Home Theater** with a MRX-10, and there are no Total Control streaming sources like the DMS-1200 or DMS-100 in the system, then the answer is **NO**, you do not need to use a MFSPOE-8. If you have DMS-1200(s) or DMS-100(s) in the system, then the answer is **YES**, you *must* use a MFSPOE-8 or MFS-8 in the system, connected to the those components.

Can I connect both PoE (*Power over Ethernet*) devices and Non-PoE devices to the MFSPOE-8?

Yes, the MFSPOE-8 incorporates Smart Port technology which automatically determines whether a connected device is a PoE device, or a standard device, and only applies voltage to PoE devices. All standard (*Non-PoE*) network devices can safely be connected to the MFSPOE-8.

What if I have more than eight devices that are PoE?

You can connect a standard PoE switch anywhere on the LAN to expand the network.

Can I use the MFSPOE-8 to power a PoE WAP (Wireless Access Point)?

No, the WAP will not function properly when multiple streams are occurring in the system. Connect the WAP to a standard PoE network switch, outside of the MFSPOE-8. *Never connect a WAP to the MFSPOE-8.*

What if I have a large Total Control system? Should I use the MFSPOE-8?

If you have a large Total Control system with multiple DMS-1200s, DMS-100s, SNP-1s, Keypads and IP Cameras, the better solution is to use a MFS-8 (*the Non-PoE version of the MAC Filtering switch*) to connect all the streaming products and use conventional PoE switches to power all the Keypads and IP Cameras. See the Large System diagram in the MFS-8 User Guide for more details.

I have one CAT5 cable going to a room where my client has a network printer and a PC and I need to install a DMS-100 Single Zone Amplifier, via the same CAT5 cable, in the room. How do I connect everything?

Install the MFSPOE-8 in the room that contains the CAT5 distribution for the entire house. In the room where you plan to install the DMS-100, connect a standard network switch to the incoming CAT5, and then connect the DMS-100, PC and Printer to the switch. It is not recommended to connect PCs used for internet gaming to a MFSPOE-8, as this may affect the performance of video gaming during heavy stream usage.

Specifications

Microprocessor: 55MHz RISC

Memory: 4 Megabits of Serial Flash, 512KB Flash, 128KB SRAM

Network: Switching - Eight 10/100 Ethernet ports + Eight PoE ports
LAN - One 10/100 Ethernet port

Power Supply: 48V External Power Supply

POWER OUT: 8 Port POE OUTPUT($6.2W \times 8 = 50W$, 1PORT
MAX=15.4W)

Size: 1.5" x 9.8" x 4.9" (H X W x D)

Weight: 0.78 lbs. (0.35kg)

Limited Warranty Statement

1. LIMITED WARRANTY AND DISCLAIMERS

Universal Remote Control, Inc. ("URC") warrants that URC equipment purchased directly from URC or from an authorized URC dealer or distributor shall be free from defects in material and workmanship under normal usage for a period of one (1) year from the date of purchase of the product by the end-user, but no longer than thirty-six (36) months from the date of shipment of the URC equipment by URC to an authorized URC dealer or distributor, except that with respect to Total Control® whole-house products, the warranty extends for two (2) years from the date of purchase by the end-user, but no longer than forty-eight (48) months from the date of shipment of the URC equipment by URC to an authorized URC dealer or distributor.

This limited warranty is valid only in the United States of America.

URC equipment purchased from other than an authorized URC dealer or distributor is without warranty.

URC warrants that the software will substantially conform in any material respect to its functional specifications at the time of delivery. URC SHALL NOT BE LIABLE FOR OPERATIONAL, TECHNICAL OR EDITORIAL ERRORS AND/OR OMISSIONS MADE IN THE URC DOCUMENTATION. URC DOES NOT WARRANT THAT THE URC SOFTWARE IS BUG-FREE OR ERROR FREE OR THAT THERE ARE NO ERRORS/BUGS IN THE URC SOFTWARE.

URC warrants that at the time of purchase the URC equipment and the URC software complied with all applicable regulations and policies of the Federal Communications Commission ("FCC") regarding electromagnetic interference caused by electronic/computing devices and to the extent that the URC equipment and/or the URC software fails to so comply, URC shall, at its own expense, take all reasonable measures to promptly cause such to comply.

THIS LIMITED WARRANTY DOES NOT COVER TECHNICAL ASSISTANCE FOR HARDWARE OR SOFTWARE USAGE EXCEPT AS EXPRESSLY PROVIDED FOR HEREIN.

CERTAIN IMPLIED WARRANTIES, INCLUDING AN IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, MAY BE AVAILABLE WITH RESPECT TO URC EQUIPMENT. IMPLIED WARRANTIES VARY FROM STATE TO STATE. URC EXPRESSLY LIMITS THESE IMPLIED WARRANTIES, TO THE EXTENT ALLOWABLE BY LAW, TO THE TIME PERIODS COVERED BY THE EXPRESS WRITTEN WARRANTIES PROVIDED HEREIN. OTHERWISE AND EXCEPT AS PROVIDED FOR HEREIN, URC EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESS, STATUTORY OR IMPLIED, AND MAKES NO REPRESENTATIONS REGARDING THE USE OF, OR THE RESULTS OF THE USE OF, THE EQUIPMENT, SOFTWARE OR DOCUMENTATION IN TERMS OF CORRECTNESS, ACCURACY, RELIABILITY OR OTHERWISE.

EXCEPT AS EXPRESSLY PROVIDED FOR HEREIN, TECHNICAL SERVICES ARE SUPPLIED "AS IS", WITHOUT ANY WARRANTY, EXPRESS, STATUTORY OR IMPLIED, OF ANY KIND. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, URC EXPRESSLY DISCLAIMS ALL WARRANTIES RELATING TO TECHNICAL SERVICES, EXPRESS, STATUTORY OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF QUALITY OR REASONABLE SKILL AND CARE, OR OUTCOME OR RESULTS.

WITHOUT IN ANY WAY LIMITING THE GENERALITY OF THE OTHER PROVISIONS HEREIN, THIS LIMITED WARRANTY DOES NOT COVER: (I) DAMAGE FROM MISUSE, NEGLIGENCE OR ACTS OF NATURE, (II) MODIFICATIONS, (III) INTEGRATION WITH THIRD PARTY CONTENT, OR (IV) BEYOND THE WARRANTY PERIOD AND/ OR FAILURE TO FOLLOW URC WARRANTY CLAIM PROCEDURE.

The warranty limitations and warranty disclaimers may not apply to end user in whole or in part, where such are restricted or excluded by applicable law, and such shall apply to the maximum extent permitted by applicable law.

In the event of any warranty claim, URC will, at its sole option, repair the URC equipment using new or comparable rebuilt parts, or exchange the URC equipment for new or rebuilt equipment. **In the event of a defect, these are the end user's exclusive remedies.**

All the URC equipment returned for service, exchange or repair require an RGA number. To obtain an RGA number, you must complete a Return Request Form which you may obtain by calling (914) 835-4484 or contacting URC at returnrequest@universalremote.com. To obtain warranty service, end user must deliver the URC equipment, freight prepaid, in its original packaging or packaging affording adequate protection to URC at 420 Columbus Avenue, Valhalla, NY 10595. It is end user's responsibility to backup any macro programming, artwork, software or other materials that may have been programmed into the unit. It is likely that such data, software, or other materials will be lost during service and URC will not be responsible for any such damage or loss. A dated purchase receipt, bill of sale, installation contract or other verifiable proof of purchase is required. For the URC equipment support and other important information, please visit URC's website available at www.universalremote.com or call the Customer Service Center at (914) 835-4484.

This limited warranty only covers the URC equipment issues caused by defects in material or workmanship during ordinary consumer use. It does not cover product issues caused by any other reason, including but not limited to product issues due to commercial use, acts of God, third-party installation, misuse, limitations of technology, or modification of or to any part of the URC equipment. This limited warranty does not cover the URC equipment sold as used, as is, refurbished, so called "B stock" or consumables (such as batteries). This limited warranty is invalid if the factory applied serial number has been altered or removed from the URC equipment. **This limited warranty specifically excludes the URC equipment sold by unauthorized resellers.**

With the exception of URC's IR-only, broad-based consumer remotes, none of URC's PC programmable remotes or any of our Total Control® whole-house equipment are authorized for online internet sales. Buying URC's PC programmable remotes or any of our Total Control® whole-house equipment online means buying equipment that does not have URC's limited warranty. Such equipment is not eligible for URC tech support or software support, either.

2. URC'S LIMITATIONS OF LIABILITY

IN NO EVENT SHALL URC BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL, EXEMPLARY, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND OR LOSS OF PROFITS OR BUSINESS OPPORTUNITY, EVEN IF URC IS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

IN NO EVENT SHALL URC BE LIABLE FOR LOSS OF OR DAMAGE TO DATA, COMPUTER SYSTEMS OR COMPUTER PROGRAMS.

URC'S LIABILITY, IF ANY, FOR DIRECT DAMAGES OF ANY FORM SHALL BE LIMITED TO ACTUAL DAMAGES, NOT IN EXCESS OF AMOUNTS PAID BY END USER FOR THE URC EQUIPMENT.

IN NO EVENT SHALL URC BE LIABLE FOR ANY EVENTS BEYOND ITS CONTROL, INCLUDING ANY INSTANCE OF FORCE MAJEURE.

IN NO EVENT SHALL URC BE LIABLE FOR THE ACTS OR OMISSIONS OF END USER OR ANY THIRD PARTY.

THE LIMITATIONS OF LIABILITY MAY NOT APPLY TO END USER IN WHOLE OR IN PART, WHERE SUCH ARE RESTRICTED LIMITED OR EXCLUDED BY APPLICABLE LAW AND SUCH SHALL APPLY TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW.

URC SHALL NOT BE HELD RESPONSIBLE FOR THE STATEMENTS MADE BY OTHERS.

SOME STATES OR JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO END USER. THIS LIMITED WARRANTY GIVES END USER SPECIFIC LEGAL RIGHTS AND END USER MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR JURISDICTION TO JURISDICTION.

End User Agreement

The terms and conditions of the End User Agreement available at www.universalremote.com/eua.php shall apply.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- ◆ Reorient or relocate the receiving antenna.
- ◆ Increase the separation between the equipment and receiver.
- ◆ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ◆ Consult the dealer or an experienced radio/TV technician for help.

Warning!

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Note : The manufacturer is not responsible for any Radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC Caution

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

Regulatory Information to the user

■ CE conformity Notice

Products with “CE” marking comply EMC Directive 2004/108/EC issued by the commission of the European Community.


1) EMC Directive

- Emission : EN 55022
- Immunity : EN 55024
- Power : EN-61000-3-2, 3

■ Declaration of Conformity

“Hereby, Universal Remote Control Inc. declares that this MFSPOE-8 is in compliance with the Essential requirements and other relevant provisions of EMC Directive 2004/108/EC.”



Certification	CE
Type No.(Model No.)	MFSPOE-8
Batch/Serial No.	-
Power Rating	48.0V  , 1.25A

Declaration of Conformity

Company Name : Universal Remote Control Inc.
 Company Address : 500Mamaroneck Avenue, Harrison, NY 10528, U.S.A
 Contact Info rmation : www.universalremote.com
 Phone: (914)835-4484 Fax: (914)835-4532
 Brand Name : UNIVERSAL remote control
 Product Name : Mac Filtering Switch with PoE
 Model Name : MFSPOE-8

This product herewith complies with the requirements of EMC Directive (2004/108/EC) issued by the Commission of the European Community

Compliance with these directives implies conformity to the following European Community

■ EMC Directive

- EN 55022
- EN 55024
- EN 61000-3-2
- EN 61000-3-3

List of test reports and/or certificate verified compliance with the standards above

■ EMC Directive

- Report No.
- Testing Laboratory : Gumi College EMC Center

Date of issue : November 09, 2010

Name and signature of authorized person : James Novak
 Senior Product Manager
 Universal Remote Control Inc.



500 Mamaroneck Avenue, Harrison, NY 10528
Phone: (914) 835-4484 Fax: (914) 835-4532
www.universalremote.com